



**ANY JOB.
ANY SIZE.
ANY PLACE.**

60 Years of American Ingenuity

425

The **425** is a proven leader in the do-it-yourself rental market. Designed for low maintenance, rugged performance, and portability. Capable of blowing all types and brands of loosefill insulation to the manufacturer's specifications. The **425** provides a large hopper

- Light weight machine
- User friendly electric panel
- Durable powder coat finish

Two Options:

8amp or large 14 amp/2 stage blower

MATERIAL PRODUCTION RATE

MATERIAL

w/single 8amp Blower

CELLULOSE **1100 (499) ***
37 Bags per hr.*

FIBERGLASS **200 (91) ***
7 Bags per hr.*

w/single 14amp Blower

CELLULOSE **1400 (634) ***
47 Bags per hr. *

FIBERGLASS **480 (217) ***
16 Bags per hr.*

* lbs/hr (kg/hr) rating with 100 ft. (30.5 m.) of 2 1/2" (6.4 cm.) hose at 10 ft. (3.1 m.) elevation.

NOTE:

Manufacturer's product brand, density and variable blowing conditions will affect production rate.



Backed by a manufacturer's
2-YEAR WARRANTY - Made in the U.S.A.

60 Years



1958-2018 krendlmachine.com

KRENDL MACHINE COMPANY • 1201 SPENCERVILLE RD • DELPHOS, OHIO 45833 • 800.459.2069 • F 419.695.9301



KRENDL

The Innovator in Insulation Equipment™

425

Scan to learn more about Krendl Machine

• POWER REQUIREMENT •

Double input, 15/15 amp each/120 volt/60 hz

Single Input 15 amp/120 volt/60 hz
CSA/CUL /UL

• HOPPER CAPACITY •

7 cu. ft. (.20 m³)

• WEIGHT/DIMENSIONS •

214 lbs / 34" W x 20" D x 44" H

97 kg. / 97cm x 51cm x 112cm

• BLOWER/SIZE •

Single Input (120 volt)

8 amp/2-stage

Blower System yields

104 CFM @ 2 PSI

Double Input (120 volt)

14 amp/2-stage

Blower System yields

140 CFM @ 3 1/2 PSI

• OPTIONAL •

Blower Control

• AIRLOCK •

14" x 8" diameter


(35.6 cm. x 20.3 cm. diameter)

2.5" (6.4 cm.) outlet



Electric Panel

- Start & Stop buttons
- Motor reset button
- Audible alarm
- Fuse protection

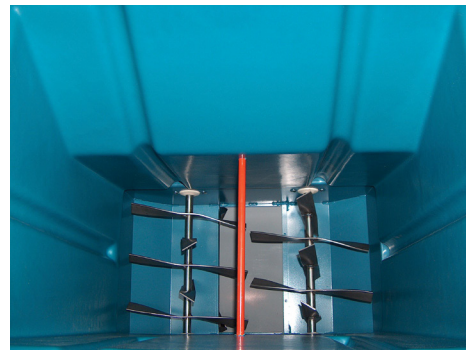

Dual Agitators

Designed for Constant Material Flow